


GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Honda MSX125 non-ABS Grom 2013-2016 (GPXT + GPX-H03)


Remove the fairing and the frame cover under the seat at the left side.

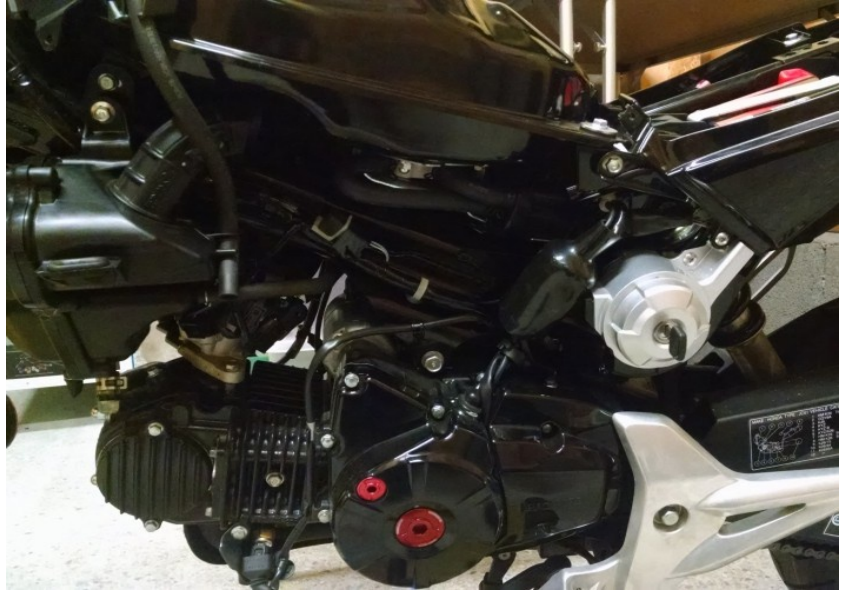


Locate the speed sensor connectors in the dust boot and disconnect it.

Route the GPX cable through the top opening of the dust boot.

(Transparent, 3-pole connector with Green and Pink wire and 1-pole connector with White/Green wire.)

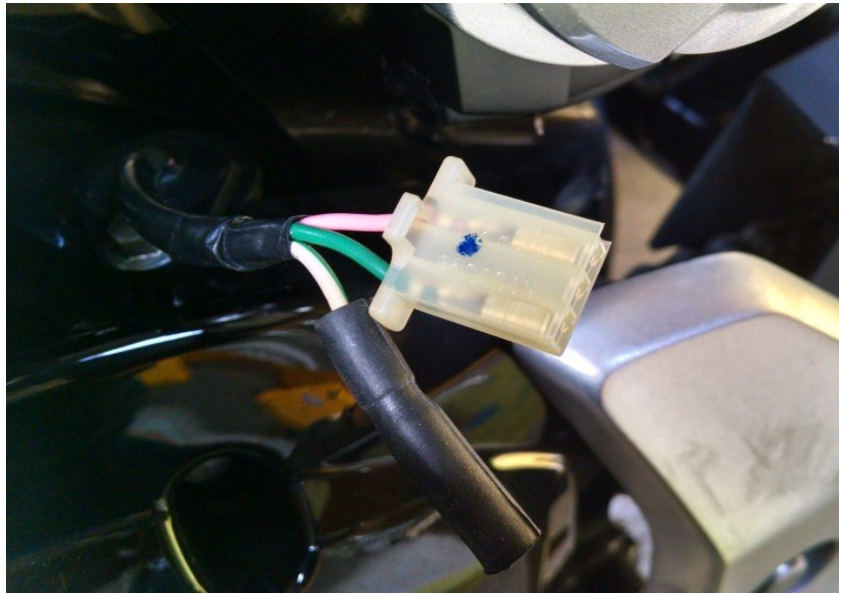

Plug the GPX connectors in-line with the speed sensor connectors.

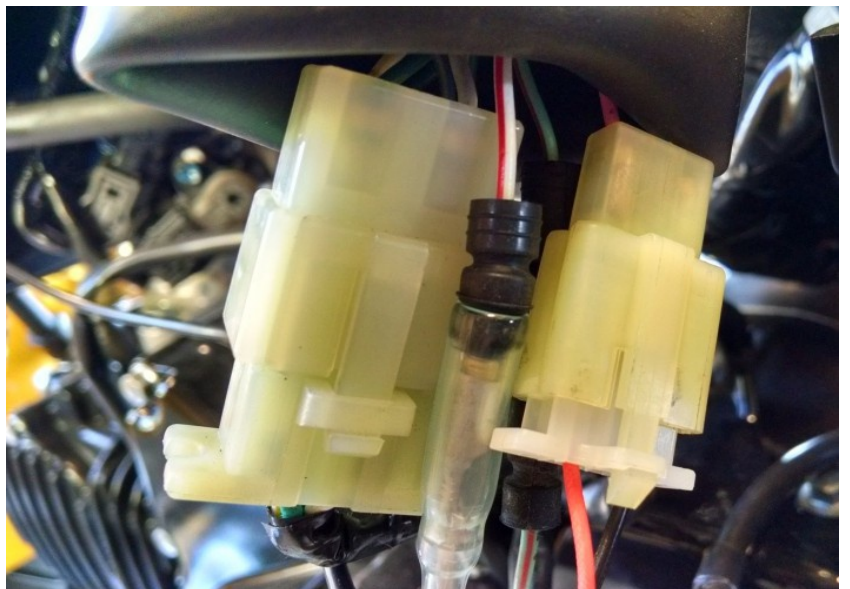

GIPRO X-TYPE GEAR INDICATOR Supplementary Manual




Honda MSX125 non-ABS Grom 2013-2016 (GPXT + GPX-H03)

Connect the GPX Black/Green wire to the

Yellow/Green wire of the ECU/ECM
connector.

(Black connector on the left side.)

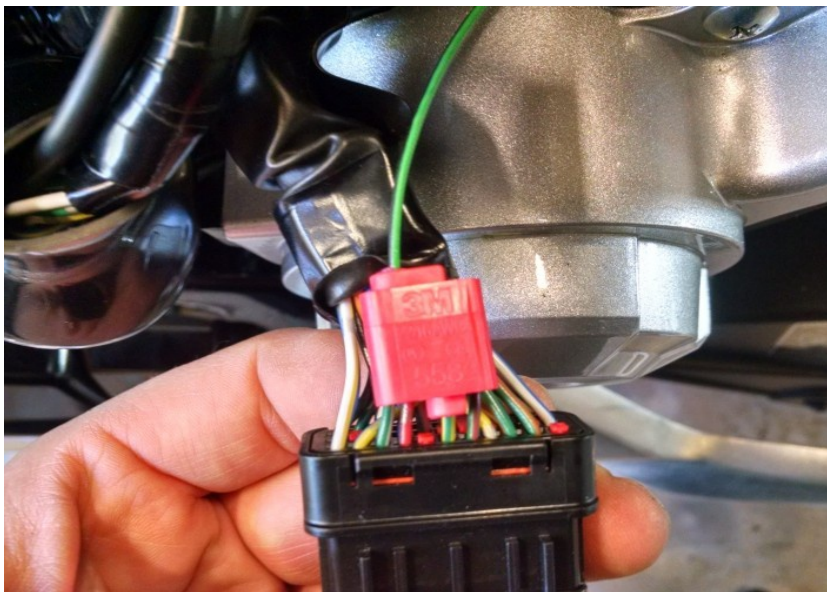

Typical position for the gear indicator.

Secure the unit properly.

