

# GIPRO X-TYPE GEAR INDICATOR

## Supplementary Manual

Husqvarna FS450 2015- (GPXT + GPX-WSS)

Secure the bike on a stand.



Remove the seat and the side fairings.



Remove the fuel tank.



# GIPRO X-TYPE GEAR INDICATOR


## Supplementary Manual




### Husqvarna FS450 2015- (GPXT + GPX-WSS)

Mount the wheel speed sensor at the rear wheel.

*(Any rotating metal targets will work, but the targets must be spaced at equal distances. Adjust and tighten the sensor so that the tip of the sensor will be in-line with the center of the target. The air-gap should be about 1mm.)*

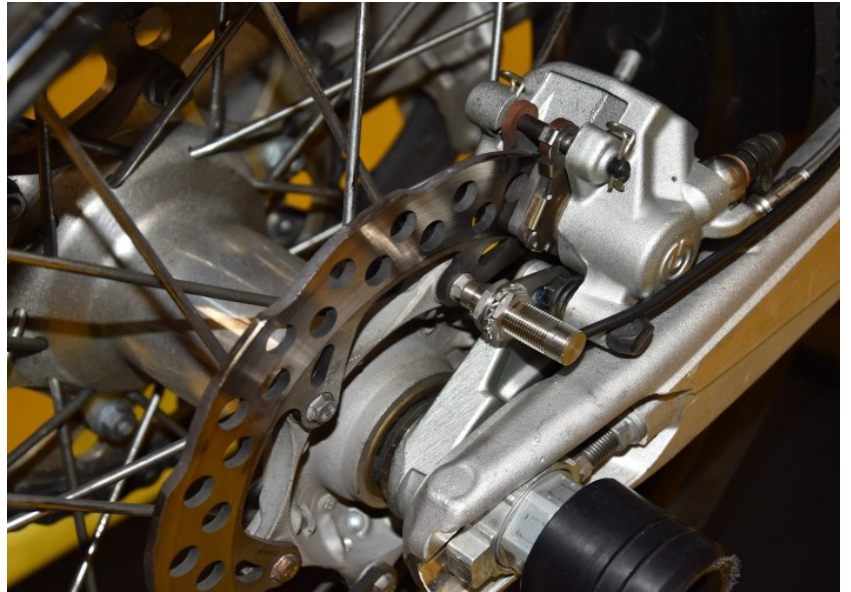

Connect GPX Black wire to the electric starter button connector Brown wire.

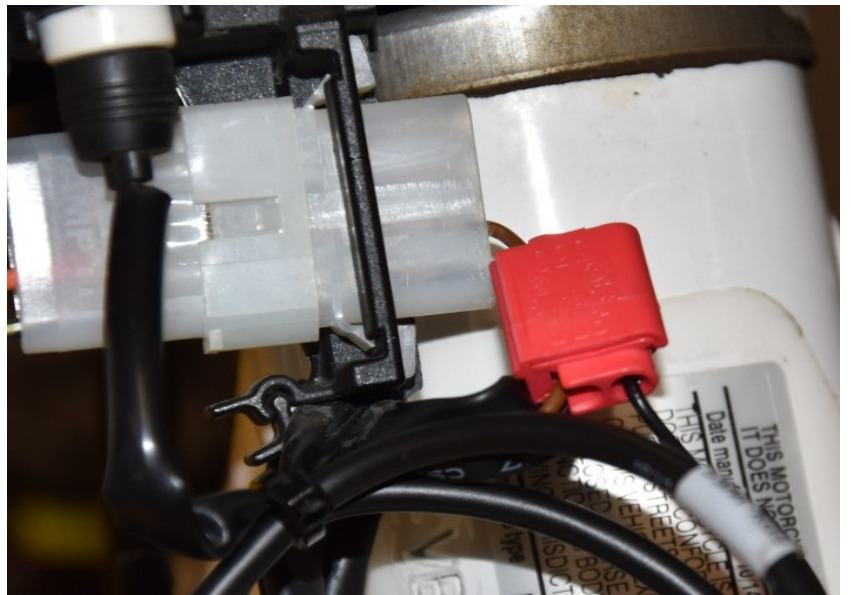

Connect GPX Red wire to the FI warning lamp connector Orange wire.





# GIPRO X-TYPE GEAR INDICATOR

## Supplementary Manual



### Husqvarna FS450 2015- (GPXT + GPX-WSS)

Connect the GPX Black/Green wire to the Yellow/White wire of the Crankshaft Position Sensor connector.

*(Blue, 2-pole connector below the seat on the left side.)*



Connect the 3-pole sensor connector to the GPX wiring harness connector and coil up the excess length.



Typical position for the Gear Indicator.

Secure the unit properly.

*(Shown with the optional Gipro Mount, part no.: GIPRO-M-BK.)*

