

GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha XT125X 2005-2008 (GPXT + GPX-WSS)

Remove the front mudguard.

Remove the headlight fairing.



Mount the wheel speed sensor on the front wheel.


(Suggested for mount 3 pcs of magnet to the wheel with equal distance spaces)



Connect GPX Red wire to the Pink wire of the parking light connector.

Connect GPX Black wire to the Black wire of the parking light connector.

(Transparent, 2-pole connector behind the head light)

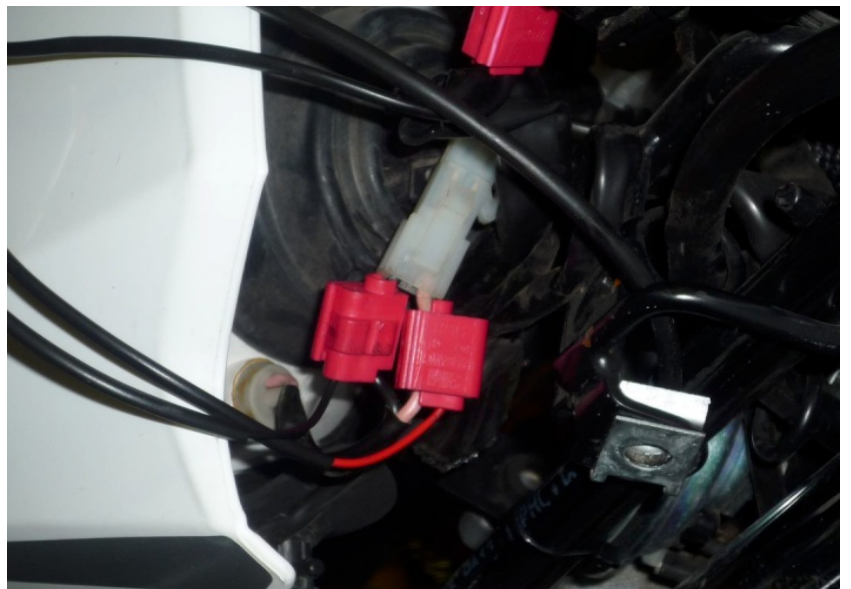


GIPRO X-TYPE GEAR INDICATOR

Supplementary Manual



Yamaha XT125X 2005-2008 (GPXT + GPX-WSS)

Connect GPX Black/Green wire to the Green/White wire of the dashboard connector.

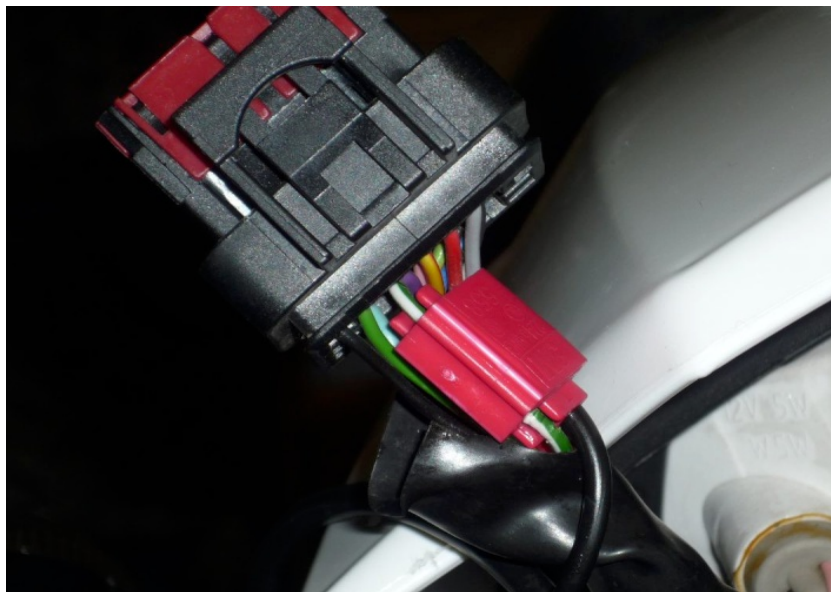

Typical position for the Gear Indicator.

Secure the unit properly.

